

F/V


SPECIALTY

30 - 50 - 70



MCCORMICK

Tractor Model		X4.30F/V	X4.50F/V	X4.70F/V
Engine				
Rated Engine HP @ 2200 RPM (ISO)	HP (kW)	68 (50)	79 (58)	95 (70)
Max Engine HP @ 2200 RPM (ISO)	HP (kW)	71 (52)	90 (66)	102 (75)
Max. Engine Torque	lb ft (Nm)	221 (300) @ 2200 RPM	295 (400) @ 2200 RPM	309 (420) @ 2200 RPM
Engine Type		DEUTZ liquid cooled diesel engine; EPA Tier 4 final compliant using <i>only</i> cooled EGR + DOC system (<i>no regeneration</i>)		
Engine Size		2.9 Liter, 4-cylinder		
Fuel Capacity	gal (liter)	21 (80)		
Drive Train				
Standard Transmission		16 x 16 speeds with creeper gear; synchronized mechanical shuttle: 25 mph (40 kph) transport speed		
Optional Transmission (1)		12 x 12 speeds; hydraulic power shuttle: 25 mph (40 kph) transport speed		
Optional Transmission (2)		48 x 16 speeds with creeper gear & 3-speed power shift; hydraulic power shuttle; 25 mph (40 kph) transport speed		
Clutch		Independent dual dry clutch standard; 11 inch		
Brakes		Heavy duty wet multi-disc disc brakes		
Differential Lock		Limited slip		
4wd Front Axle		Electro-hydraulic engagement with integrated front axle brakes		
Hydraulics, 3-point Hitch, PTO				
Standard Hydraulic Pump	gpm (lpm)	Double Pump: 20.6 (78) total flow: Dedicated steering pump 7.4 (28); implement pump 13.2 (50)		
Optional Hydraulic Pump	gpm (lpm)	Triple Pump: 29 (110) total flow: Dedicated steering pump 7.4 (28); variable implement pump 10.8 (41); front 3-valve pump 10.8 (41)		
Rear Remote Valves		2 standard; up to 4 available		
Additional Hydraulic Options		6 mid-mounted quick couplings (HM & Float) available; 3 mid-mounted spool valves w/ joystick control available		
Standard Rear 3-point Hitch Type		Category 2 with fixed ball ends; mechanical lift control		
Optional Rear 3-point Hitch Type		Category 2 with quick attach hooks; electronic lift control option (<i>F Series Only</i>)		
Rear 3-point Lift Capacity	lb (kg)	5,952 (2700) standard		
Rear PTO		2 Speeds (540/1000 rpm) standard, 4 speeds (540/750/1000/1400 rpm) optional; push button engagement; groundspeed PTO optional		
Operator's Area				
Cab		Deluxe 4 post cab, radio system, silent-block suspension		
Seat and Front Dash		Deluxe air suspended seat; tilt and telescopic steering wheel		
Wheelbase with 420/70R28 Rear Tires	in (mm)	84 (2134)		
Height Over Cab	in (mm)	F Series: 94 (2388); with 420/70R28 Rear Tires V Series: 92 (2338); with 340/85R24 Rear Tires		
Overall Length with front weights	in (mm)	114 (2900)		
Base Weight without ballast	lb (kg)	6,172 (2800)		

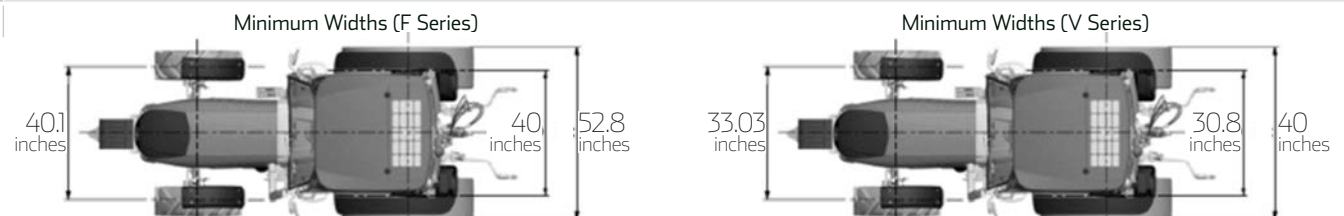

All above specifications are manufacturer's calculated estimates.